

M & W IGNITIONS

(C)1996 - 2004 M&W IGNITIONS

CAUTION!


This igniter current limits at 9A and is temperature protected!

In the event of excessive temperature the maximum coil current will be reduced to prevent damage to the module.

It is up to the customer to select a suitable ignition dwell time and minimum off time to obtain the required coil current. Failure to do so will result in either insufficient ignition energy or the possibility of a damaged ignition coil.

NOTE!
MULTIPLE OUTPUTS
NOT TO BE FIRED SIMULTANEOUSLY

NOTE!
WIRE EXACTLY AS SHOWN
DISREGARD NUMBERS INSIDE CONNECTOR

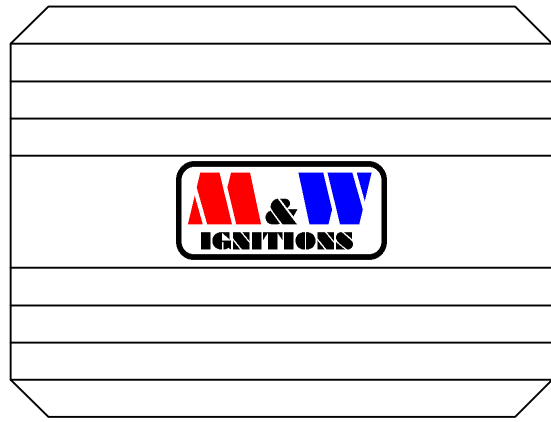

- Coil negative #1 (1)
- Trigger #1 (2)
- Coil negative #3 *+ (3)
- Ground (4)
- Trigger #3 *+ (5)
- Coil negative #2 * (6)
- Trigger #2 * (7)

* 2 & 3 channel units only!
 + 3 channel units only!

SPECIFICATIONS

Current limit = 9 amps
 Operating temperature = -40°C to +125°C
 Maximum conduction time = 1000mS
 Minimum trigger voltage = 5v
 Dimensions = 85L * 85W * 25H
 Weight = 120gm

HALTECH CUSTOMERS

The ECU dwell control must be set for 'CONSTANT CHARGE' before connecting the ingiter. Failure to do so may result in damage to either the igniter or ignition coil.

Title			
9A IGNITION MODULE - REVISION B			
Size	Number	Revision	
A4	MW008(B) - MW010IGN(B)	1.5	
Date:	29-Aug-2004	Sheet 1 of	1
File:	D:\M&W\Triple 9A.sch	Drawn By:	M&W